


weberfloor Comfort Lite 30 mm EPS insulation roll

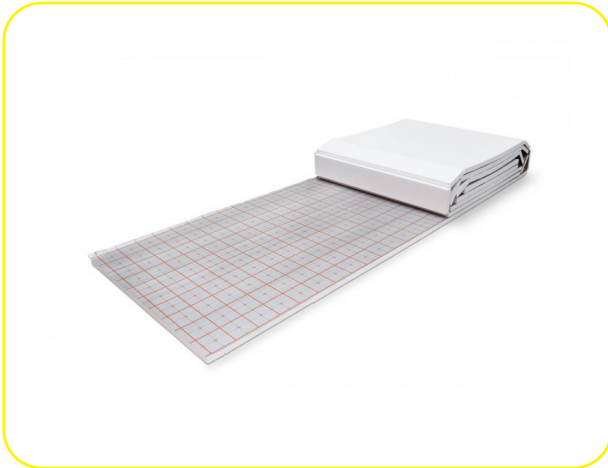

- Covered by tear and waterproof overlapping tissue foil with printed grid.

ABOUT THIS PRODUCT

Ready for use heat and impact sound insulation board from quality-controlled polystyrene foam EPS that enables a resilient sound insulation layer.

AREA OF USE

weberfloor Comfort Lite insulation board enables a fast reacting floor with a floor heating for tenement buildings and terraced houses when used with Weber's floor screeds.

The weberfloor Comfort Lite impact sound insulation solution together with Weber's pumpable floor screeds is recommended for use especially when good impact sound insulation is desired (e.g. the standardized impact sound pressure level requirement ($L'_{n,TW} + C_{1,50-2500} < 53$ dB) given by the Ministry of the Environment (regulation 796/2017)).

SUBSTRATE

The substrate must be firm, clean and dry. Bigger deviations in the substrate should be smoothed out with a screed. Install the weberfloor 4960 insulation strips against all vertical structures and penetrations, such as sewers, water and heating pipes etc. Install needed stoppers for the pump work and seal all the necessary places

PRODUCT SPECIFICATION

Dimensions (LxWxH)	10000 x 1000 x 30 mm
Flexural strength	BS50: ≥ 50 kPa
Reaction to fire (for exposure situations)	E
Thermal conductivity	< 0.045 W/mK
Dynamic stiffness	≥ 30 mm: ≤ 15 MN/m ²
Compressibility	CP3
Package	10 m ² roll
GTIN-codes	6415910054007 (10 m ²)
Certifications	CE

for compactness before the application of screed.

The Comfort Lite boards are spread and the seams are tightly taped before pumping. The underfloor heating pipes are installed on top of the insulation layer with e.g. weberfloor Comfort Lite Clip T2 pipe clips. Apply the weberfloor 4945 Fiberglass mesh with an overlap of min. 50 mm on top of the underfloor heating pipes.

TO KNOW BEFORE APPLYING

Shut off the floor heating at least a day before tiling or glueing covering materials onto the floor. Let the tile fix or glue set properly until connecting the floor heating again. Additional information to be found on www.fi.weber

WORK INSTRUCTIONS

Machine apply the weber 130 core Self Level Comfort (min. of 40 mm with 17 mm pipes). As the floor heating pipes are completely separated from the screed, the floor heating can be connected at a luke warm (+15...+20 °C) temperature even during the pumping or be connected immediately thereafter. Let the screed set for at least 24 h before eventually raising the water temperature. Avoid outgoing water temperatures above +35 °C until the floor covering is installed.

PLEASE OBSERVE

Avoid drilling, screwing or nailing into the floor. Fix thresholds and cupboards by glueing. Ensure that the parquetry layer or tile setter does not assemble the floor covering material towards any pipes or supporting walls. This would spoil the impact sound reduction.

DISCLAIMER

As there are different conditions at every opportunity, Weber can not be held responsible for anything other than the information provided under the heading "Product Specification". Examples of information and

circumstances, which are outside Saint-Gobain (whether specifically stated or not) include storage, construction, processing, interoperability with other products, workmanship and local conditions.

SALES UNITS

Product Code	GTIN	Name	Length	Width	Height	Weight	SU/ UoP2	SU/ UoP3
1025283	6415910054007	weber.floor Comfort Lite 30 mm 10 m2 PL	1050 mm	1000 mm	300 mm	4.950 kg	9	